

atHand™

OVERBED TABLE SYSTEM

Instructions for Use

Assembly Instructions



Properly assembled unit with optional accessories

Instructions for Use

The atHand® Table should not be used as a bed rail, to assist with walking or to support the user's bodyweight in any way.

Tray Table:

1. To adjust the tray table to the desired height:
 - a. Lower by squeezing the handle on either side of the tray table, then gently pushing down.
 - b. Raise by pushing up on the table or arm, no need to squeeze the handle.
2. Tray table can be folded for storage by squeezing the handle on the far end of the tray and lowering it toward the spine.



3. For added comfort, the tray table can be rotated 45° by pulling the far end towards the user.

Shelves:

- The height of shelves can be adjusted by loosening the thumb screws and raising or lowering to one of the 3 pre-set holes on the spine. Retighten the thumb screws.
- If more than two shelves are being used, select the highest preset hole.

- Each shelf has two cord pass-throughs for convenience.

Drawers:

- Drawers fit into any open shelf and are completely removable for cleaning.

Handles:

- Handles can be used to move the table or to hang personal items.

Lights:

- Lights are touch on/off, each with three levels of brightness. Turn on the gooseneck task light by touching anywhere on the top surface. Turn on the ambient light by touching anywhere on the front silver surface. Cycle through brightness levels until the desired setting is reached.



Cleaning:

- Clean all surfaces as needed with soapy water or a household disinfectant.

Optional Accessories Available Separately:

- An accessory kit includes one each of:
 - Cup/Remote holder
 - Trash bin with lid
 - Shelf basket
 - Small bin
- Additional open shelf
- Additional drawer

Visit www.integrantllc.com for ordering details.

Warnings:

Max power rating for power outlets: 125V

Max weight capacity of storage compartments: 5 pounds each

Max weight capacity of tray table: 100 pounds

This product is not intended for use as support or bed rail

For indoor use only

Electrical components are safety agency listed: UL, CSA or equivalent.

Warranty:

At Integrant, we take great pride in the quality and craftsmanship of our products. Attention to design, materials, construction and safety is our priority. We carefully inspect your order prior to shipment.

Upon receipt, please inspect your purchase and notify us of any damage or defect immediately. We will arrange for a prompt replacement.

If, within 30 days of receipt, you are dissatisfied for any reason, you may return your purchase for a full refund of the merchandise value. Simply return the unused item **in its original packaging** to the address below. You are responsible for return shipping costs.


The product is warranted against defects for three years. Visit integrantllc.com for details or contact us at info@integrantllc.com.

Assembly Instructions Box


Contents:



BOX 1

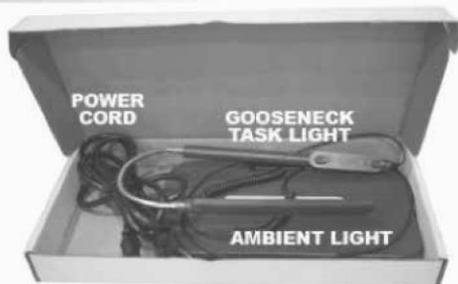

BOX 2

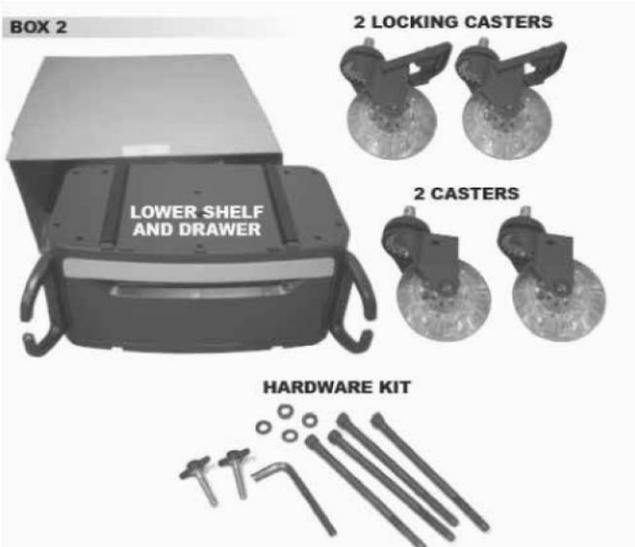


BOX 3



Preparing for Assembly

Keep the main box and unit lying flat while performing these steps.

1. Remove the base from the box and padding. Place it face down on a hard, flat surface. Purple dots should be visible.

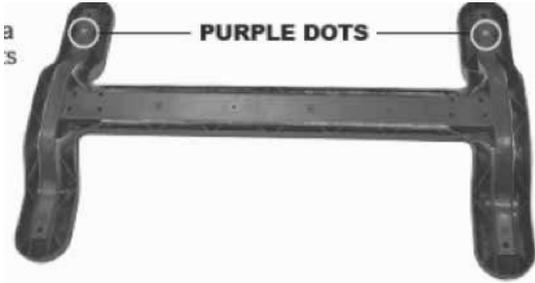

2. Remove all inner boxes.
3. Open the smaller of the two brown boxes to find the casters.
4. Push locking casters straight down into the holes on the ends marked with purple dots.
5. Push non-locking casters straight down into the holes on the opposite ends.


If insertion is difficult, make sure the rings on the caster stems are centered on the stem.

6. Ensure that the strap holding down the tray table is intact and remove the spine/tray table assembly from the box and lay it down flat.




Assembling the base to the spine

1. With the spine/tray assembly lying flat, hold the tray table arm in place and remove the strap. Allow the tray table to slide up the spine slowly.
2. Align the bottom of the spine with the uncovered oval shaped opening in the base.

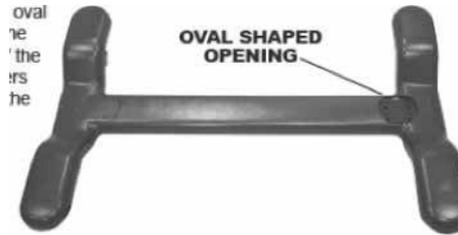

3. From the hardware kit, place one washer onto each of the four screws and insert into each of the 4 holes located on the under side of the base.
4. Using the hex wrench provided in the hardware kit, tighten each screw, following an X pattern.
5. Keep the table lying flat.

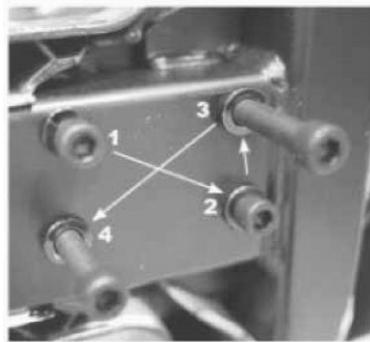

Assembling the shelves

1. Remove the lower shelf from box 2 and upper shelf from box 3.

2. Connect the shelves to each other by sliding the lower shelf into the rails on the bottom of the upper shelf.



3. With the unit lying flat, locate the wide slot at the bottom of the spine. 4. Place the connected shelves into the slot and slide in and up the spine. The lower shelf with side handles should be closest to the base.



5. Select the desired height of the shelves and secure upper shelf onto spine using one thumb screw from the hardware kit. If additional shelves will be used, secure into the upper most hole. 6.

Remove the drawer from the lower shelf and secure with the second thumb screw from the hardware kit.

7. Replace the drawer in either the upper or lower shelf.



8. Slide the ambient light into the rails at on the bottom of the lower shelf.

9. Plug the ambient light into any USB port.

Powering Up the atHand

1. Connect the female end of the power cord to the male inlet on the base, then plug into any household outlet.



2. Select a position for the gooseneck light in any accessory mounting holes. Push in then down to lock into place and plug into any USB port.



Enjoy your atHand Overbed Table System!

INTEGRANT™

Manufactured by:

Integrant LLC
12315 York Delta Drive
North Royalton, OH 44133
440-628-9550

www.integrantllc.com

U.S. Patent 9993076

16774 rev b